


F + R + L Air 3 Pc (Filter + Regulator + Lubricator)

Features

- ▶ High Flow Design
- ▶ Heavy Duty & Durable Design
- ▶ Comfortable to all industrial use.
- ▶ Turn 'T' Type key clock wise to Increase Pressure
- ▶ Easy Installation
- ▶ Precise Regulating Lubrication
- ▶ Type of Oil to be used ISO VG32

Technical Specification

Model	AFRL-MD-6	AFRL-MD-10	AFRL-MD-15
Size	1/4"	3/8"	1/2"
Inlet Pressure	10 Kg/cm ²		
Outlet Pressure	0 to 8 Kg/cm ²		
Temperature	50 °C (max.)		
Media	Compressed Air		
Weight (Approx.)	1.397	1.397	1.397

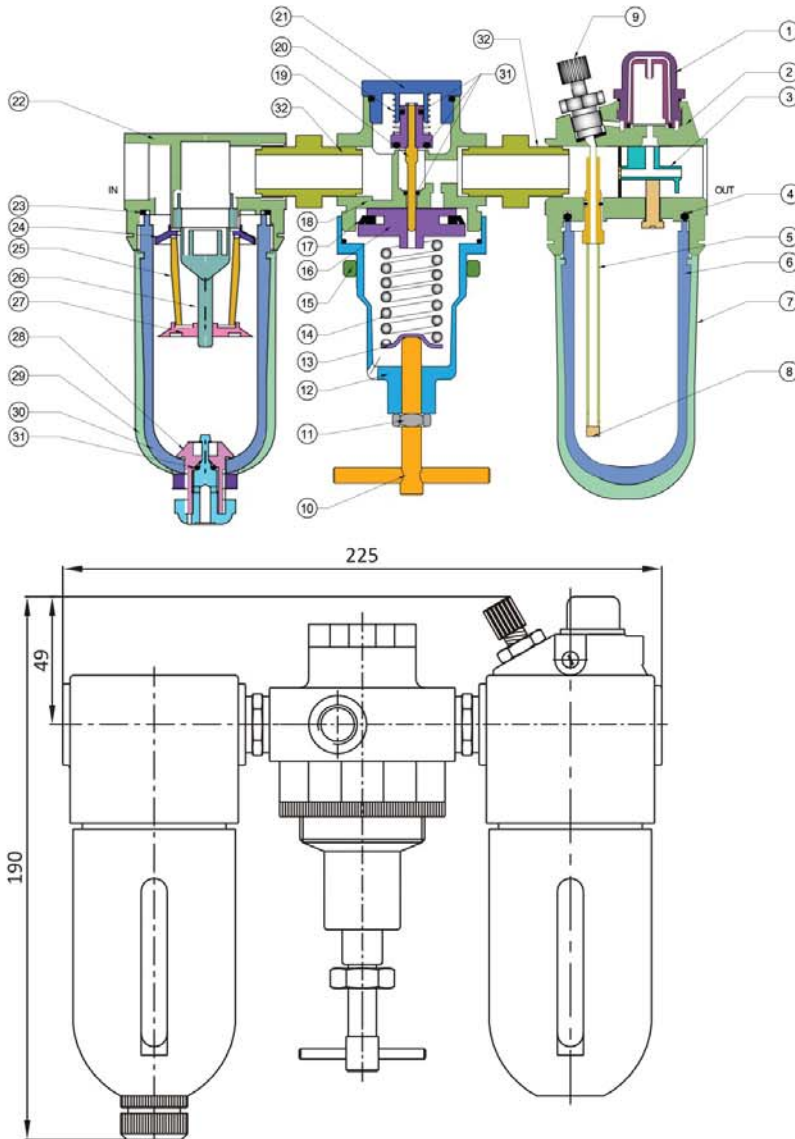

No.	Part Name	Material
1	Oil Indicator Dom Set	Poly Carbonate
2	Lubricator Body	Aluminum Pressure Die Cast
3	Distributor	Nylon
4	'O' Ring	NBR
5	Oil Pipe	P. U.
6	Bowl	Poly Carbonate
7	Bowl Guard	Nylon
8	Filter Element	Sinter Bronze
9	Adjusting Knob	Brass
10	'T' Type Knob	Steel Plated
11	Check Nut	Brass
12	Bonnet Cover	Aluminum Pressure Die Cast
13	Spring Guide	Aluminum / Steel
14	Spring	Spring Steel
15	Penal Ring	Aluminum / Nylon
16	Piston	Polyacetal
17	'V' Seal	NBR
18	Regulator Body	Aluminum Pressure Die Cast
19	Plunger with Rubber Molded	Brass
20	Spring	S. S.
21	Bottom Plug	Nylon
22	Filter Body	Aluminum Pressure Die Cast
23	Flat Ring	NBR
24	Deflector	Nylon
25	Filter Element	Poly Porous (25 Micron)
26	Guide	Nylon
27	Baffle	Nylon
28	Drain Cock Set	Nylon
29	Bowl Guard	Nylon
30	Bowl	Poly Carbonate
31	'O' Ring	NBR
32	Connector	Aluminum / G.I.